




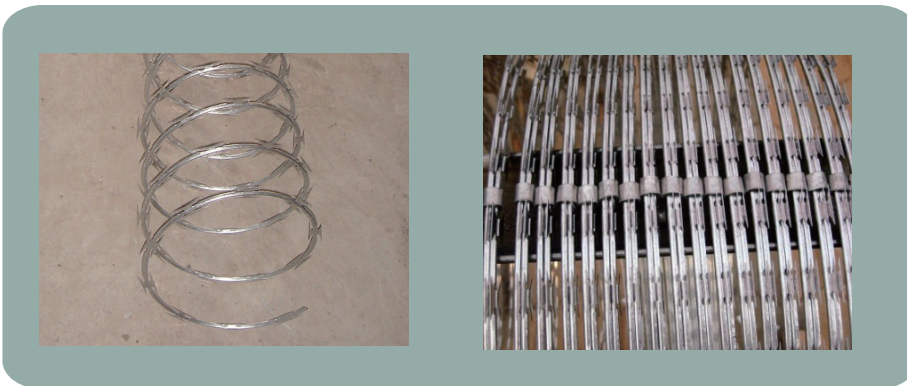

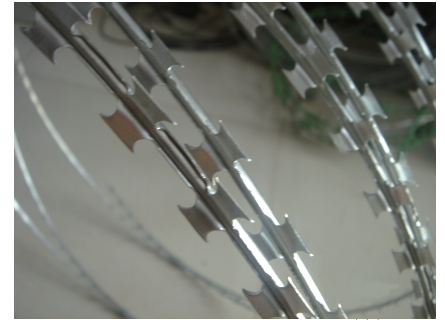



QYM-Concertina Razor Wire

When you need to get serious about security, Concertina Razor Wire is the answer. It is relatively inexpensive, but viciously effective. Razor Wire around the perimeter is enough to deter any would-be vandal, robber or saboteur. Razor Wire is made of a corrosion resistant galvanized steel cutting ribbon wrapped around a core of galvanized spring steel wire. It's impossible to cut without highly specialized tools, and even then it's a slow, dangerous job. Concertina Razor Wire is a long lasting and very effective barrier technology, known and trusted by security professionals.



Standard Specifications



Reference Number	Blade Style	Thickness	Wire Dia	Blade Length	Blade Width	Blade spacing
BTO-10		0.5±0.05	2.5±0.1	10±1	15±1	26±1
BTO-12		0.5±0.05	2.5±0.1	12±1	15±1	26±1
BTO-22		0.5±0.05	2.5±0.1	22±1	15±1	34±1
CBT-25		0.5±0.05	2.5±0.1	25±1	16±1	40±1
BTO-30		0.5±0.05	2.5±0.1	30±1	18±1	45±1
CBT-60		0.6±0.05	2.5±0.1	60±2	32±1	100±2
CBT-65		0.6±0.05	2.5±0.1	65±2	21±1	100±2

Barbed Tape Concertina (CBT); Barbed Tape Obstacle (BTO)



Standard materials are either galvanized or stainless steel. 430/304/316

Standard packages products are shown in the tables above, special specifications available on request.

10 YEAR WARRANTY

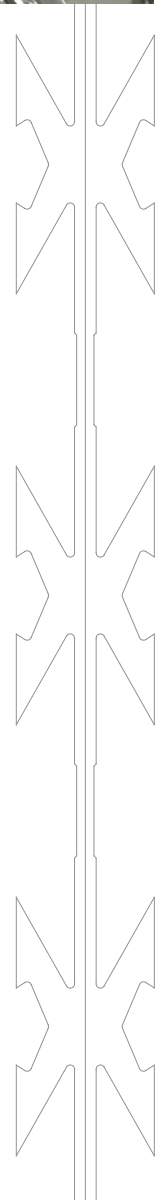

QYM-Concertina Razor Wire

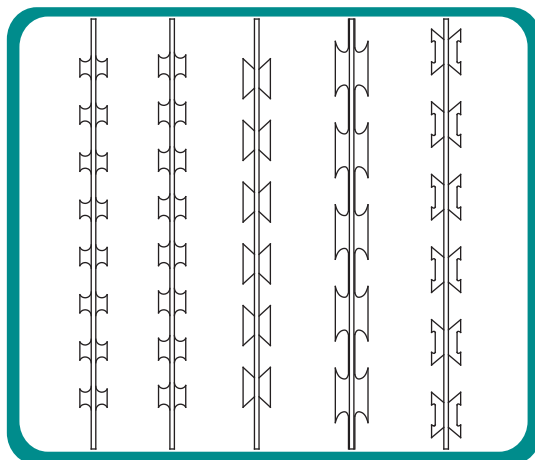

Concertina razor wire use				
Outside Diameter	No. of Loops	Standard Length per Coil	Type	Notes
450 mm	33	7-8 M	CBT-60.65	Single coil
500 mm	56	12-13 M	CBT-60.65	Single coil
700 mm	56	13-14 M	CBT-60.65	Single coil
960 mm	56	14-15 M	CBT-60.65	Single coil
450 mm	56	8-9 M (3 CLIPS)	BTO-10.12.18.22.28.30	Cross type
500 mm	56	9-10 M (3 CLIPS)	BTO-10.12.18.22.28.30	Cross type
600 mm	56	10-11 M (3 CLIPS)	BTO-10.12.18.22.28.30	Cross type
600 mm	56	8-10 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type
700 mm	56	10-12 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type
800 mm	56	11-13 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type
900 mm	56	12-14 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type
960 mm	56	13-15 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type
980 mm	56	14-16 M (5 CLIPS)	BTO-10.12.18.22.28.30	Cross type

